

# Conti Flamingo Infrared Hob Basin Tap

## Single Temperature - Mains Power

Specification Data Sheet



### Features

- Single temperature
- Double infrared sensor with automatic setting feature and microprocessor
- Bi-Stable magnetic solenoid valve (for increased energy saving)
- Water Supply Connection with flexible high pressure hose and strainer
- Aqua click feature enables temporary - off (for cleaning purposes) or continuous water flow (for filling the basin)
- Appropriate mounting hardware included
- Check valves and built in strainers
- 12 or 24 hour hygienic rinse activatable

### To Specify

Conti Flamingo Infrared hob mounted, chrome-plated electronic tapware is ideal for high-end or private restrooms that require the convenience of automatic activation with the option of user-controlled settings.

### Code:

**TZ-FL20SM** – Conti Flamingo Infrared Hob Mounted Basin Tap - Single Temperature - Mains Power

### Hands Free Hygiene

Ph: 1800 039 764

[sales@handsfreehygiene.com.au](mailto:sales@handsfreehygiene.com.au)

[handsfreehygiene.com.au](http://handsfreehygiene.com.au)

  
**hands free hygiene**  
clean hands, safe hands

## Performance Standards & Approvals

- AS/NZS 3718 - WaterMark
- WELS 6 Star Rating
- Engineering standards: DIN EN 200; CE




**WaterMark**  
AS/NZS 3718 Lic. WMKA 20371  
SAI Global



This tap not only passes the Australian Standard testing for potable water (AS/NZS 4020), it also complies with s1417 of the Safe Drinking Water Act in the USA and complies with NSF61 / NSF372. Therefore, in the USA this tap can be labelled as 'lead free'. In addition, all metallic materials used in this tap are listed on the European Standard (4MS Common Approach), which ensures they meet the strict German Drinking Water Guidelines.

## Typical Dimensions

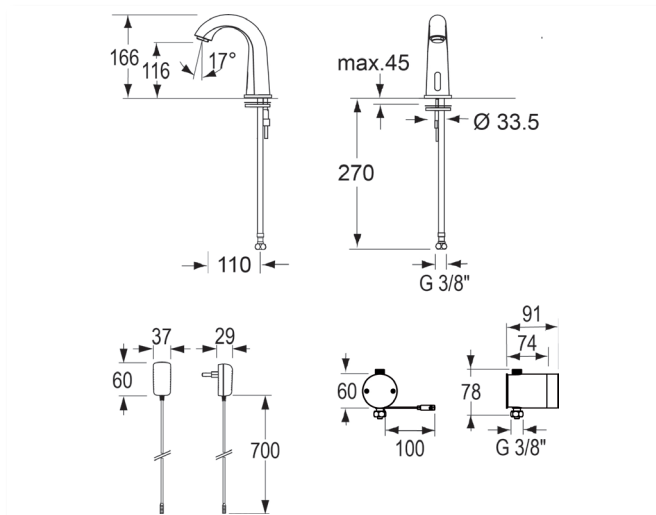

## Technical Information

- Operating pressure: 30kPa - 500kPa
- Maximum water temperature: 80°C
- Aerator: Economy aerator, cascade (self-cleaning)
- Inlet Connections: Flexible hoses at 350mm long
- Strainers: 0.5mm mesh size
- Sensor sensitivity: Automatic self-adapting sensor technology
- Sensor range nominal: 102mm - 127mm
- Hygienic rinse time: 2 minutes pre-set (adjustable from 0.5 - 20 minutes)
- Engineering standards: Noise class I, DIN EN 200; P-IX 9576 / IA

\*As 'lead free' is not currently defined by law in Australia and New Zealand, we have based our definition of Lead Safe™ on the requirements of s1417 of the USA's Safe Drinking Water Act (SDWA) and the relevant US standards NSF61 / NSF372. The SDWA defines 'lead free' as "not more than a weighted average of 0.25% lead when used with respect to the wetted surface of pipes, pipe fittings, plumbing fittings and fixtures".

## Operation

As the user's hands enter the beam's effective range, the beam is reflected back into the sensor receiver and activates the solenoid valve allowing water to flow from the tap. Water will flow until the hands are removed or until the tap reaches its automatic time out limit setting.

## Maintenance & Cleaning

Galvin Specialised products should be cleaned with a soft damp cloth using only mild liquid detergent or soap and water. Do not use cleaning agents containing a corrosive acid, scouring agent or solvents. Do not use cream cleaners, as they are abrasive. Use of unsuitable cleaning agents may damage the surface. Any damage caused in this way will not be covered by warranty.

Regular maintenance should be carried out in accordance with the installation and troubleshooting guides provided with the product, relevant Australian Standards, local authorities and state codes.

As part of maintaining a safe and reliable plumbing system, we recommend tapware and valves are operated on at least a daily basis.

## Warranty

Galvin Engineering products are covered under our Manufacturer's Warranty at [www.galvinengineering.com.au](http://www.galvinengineering.com.au). Galvin Engineering products must be installed in accordance with the installation instructions and in accordance with AS3500 and the PCA, relevant Australian Standards and local authorities applicable to product being installed. Water and electrical supply conditions must also comply to the applicable national and/or state standards, failing to comply with these provisions may void the product warranty and affect performance of the product.

## Hands Free Hygiene

Ph: 1800 039 764

[sales@handsfreehygiene.com.au](mailto:sales@handsfreehygiene.com.au)

[handsfreehygiene.com.au](http://handsfreehygiene.com.au)

